

# Integrated gripper

## Integrated gripper for tiltrotators and rotators 3-33 tonnes

- » The gripper arms are made from high-strength steel for strength and low weight
- » Load-holding check valves in each gripper cylinder
- » The perfect workmate on the site
- » Versatile handling of posts, kerbstones and other objects
- » Practical for pipe laying and manhole positioning
- » Available for tiltrotators/rotators EC204, EC206, EC209, EC214, EC219, EC226 and EC233
- » 3 finger claws as standard
- » Complies with European safety standards

### Advantages of the GR30 (S80):


- ▶ Gripper width up to 1080 mm



### Specifications

Model	GR05	GR10	GR30*
Widest grab width A: (mm)	350	610	1 080
Width B: (mm)	200	270	440
Length C: (mm)	585	760	980
Clamping force (tip - tip) at 21 MPa: (kg)	1 654	1 497	1 956
Max load: (kg)	1 000	1 500	2 200
Weight: (kg)*	50	70	148
Max hydraulic pressure: (MPa)	22	22	22

\* Depending on attachment

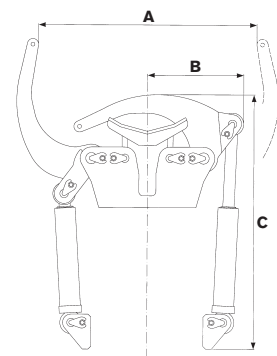

**CHANGE THE WORLD OF DIGGING**